


Dim-Out Blind Systems





Dim-Out Blind System

Silent Gliss® 4540




Product Information

- Technically advanced crank-operated blind dim-out blinds.
- Choice of two cassette headboxes depending on drop and thickness of fabric.
- Choice of two side profiles depending on installation requirements. Standard is inside recess profile and adjustable to allow for variations in width of framework. Optional outside recess profile.
- Fabrics are contained within the side profiles by rivets (or a crossbar in heavy duty situations) to prevent the fabric coming out.
- Standard colours: aluminium anodised or white powder coated.
- Plastic components are black or white in all cases.
- Choice of FR blackout fabrics.
- Delivered ready-assembled made-to-measure.
- Can also be operated in inclined or horizontal positions up to 30° from vertical.



4540


Profile and Bending Information



4502



Only for straight systems.



4503



Only for straight systems.

The choice of fabric may influence the size of headbox/profile to be used.
Thicker fabrics may require the use of profile 4503 (73mm).

How to Measure

Measurements for Silent Gliss Dim-Out Blind Systems should be undertaken by a fully trained dim-out specialist.

System Dimensions



4502 = 180 cm
4503 = 210 cm



4502 = 30 cm
4503 = 30 cm



4502 = 180 cm
4503 = 240 cm

System Options




4540


Crank options




Standard




90°



45°




90°




45°

Fitting Information


Fitting with Endcover

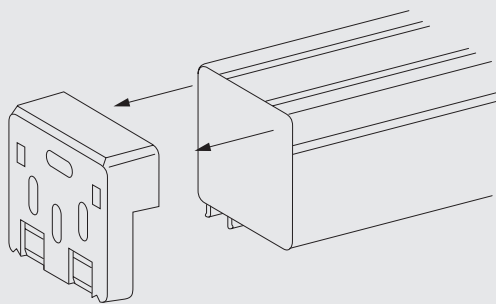


Adjustable side profiles 4511 and 4512 for inside recess



Side profiles 4513 and 4514 for outside recess

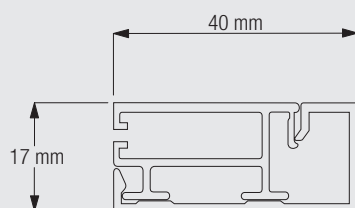

Heavy duty system with side profile 4515 and 4516

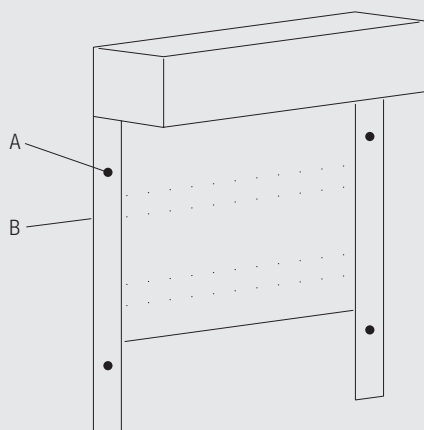


For blinds over 210 cm wide or where there is excessive air movement heavy duty side profile 4516 with welded reinforcing cross bars must be used.

A: Fixing directly through 4516 profile with 4574 endplugs for outside recess applications.

B: Side profile 4516.




4540

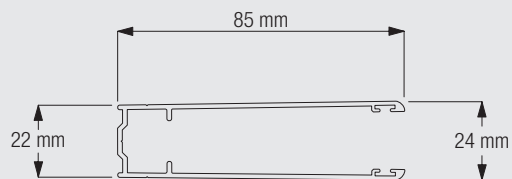


Fitting Options


Ceiling fitting



	X (cm)
4502	11,5
4503	13,5




4539
Ceiling fix bracket
(for 4502)




4541
Ceiling fix bracket
(for 4503)

Wall fitting



	X (cm)
4502	11,5
4503	13,5




4531
Wall fix bracket




4540

Outside recess fitting

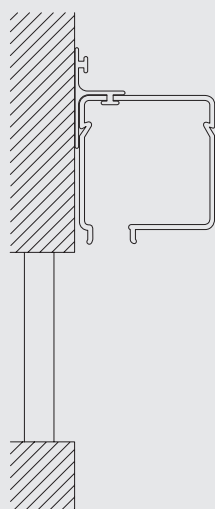



	X (cm)
4502	11,5
4503	13,5



4531
Wall fix bracket

Optional: side guides 4513/4514 as a bottom guide.

Standard Accessories

4527	Plastic end bracket (for 4502)		4531	Wall fix bracket	
4534	Right inside recess bracket (for 4502)		4535	Left inside recess bracket (for 4502)	
4536	Right inside recess bracket (for 4503)		4537	Left inside recess bracket (for 4503)	
4539	Ceiling fix bracket (for 4502)		4541	Ceiling fix bracket (for 4503)	
4599	Crank holder				



4540

www.silentgliss.at
www.silentgliss-russia.com
www.silentgliss-cee.com

Silent Gliss GesmbH
Gewerbestraße 6
A - 6710 Nenzing

Tel. + 43 (0) 5525 64 111
Fax. + 43 (0) 5525 63 170

Silent Gliss GesmbH
Jochen-Rindt-Straße 1
A - 1230 Wien

Tel. + 43 (0) 1 615 02 72
Fax. + 43 (0) 1 615 02 72-88

Silent Gliss GesmbH
Vertriebsbüro / Showroom
Stubenring 6
A – 1010 Wien

Tel. +43 (0) 1 513 16 77
Fax. +43 (0) 1 513 16 77-88