



Panel Glide Systems



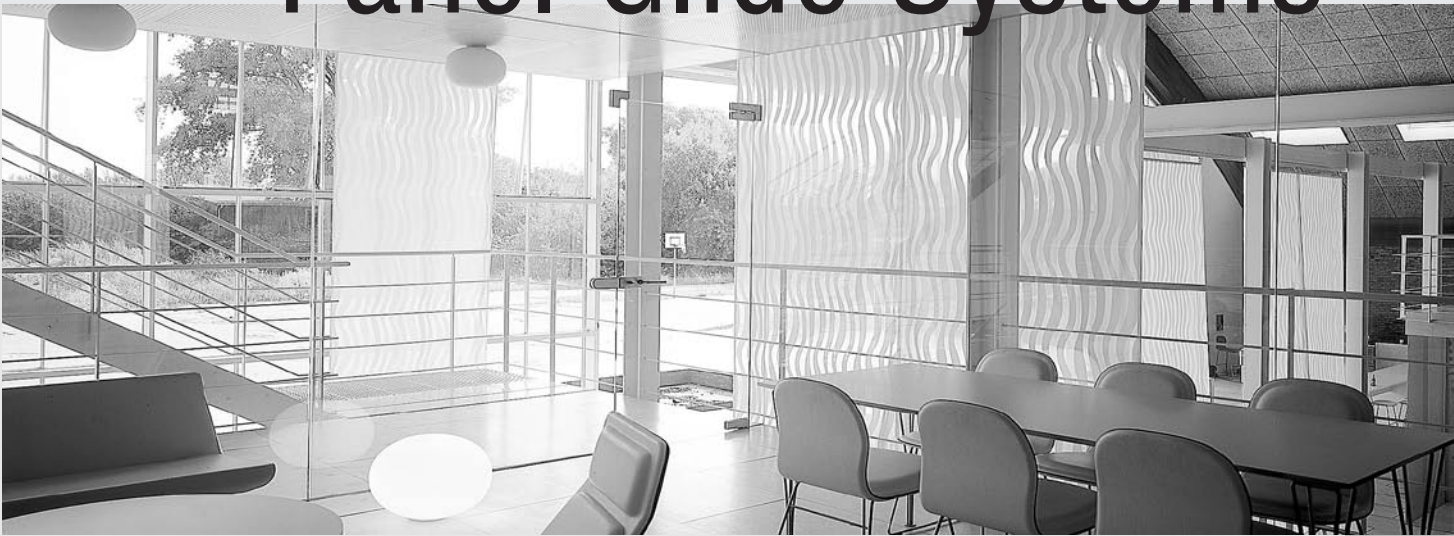

Folding Panel

Silent Gliss® 2640

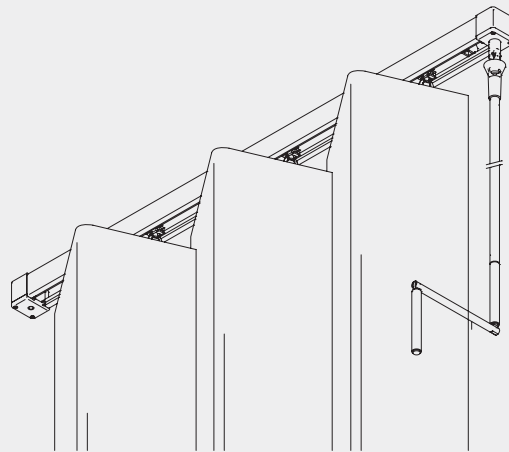

Product Information


- Comfortable crank operation. Folding and unfolding as well as open-close traverse with one action.
- Maximal system width: 5m.
- Maximal system drop: 3m.
- One system can carry up to 8 panels.
- Depending on the total system width, panels can be selected in three different size ranges: SMALL (40-57cm), MEDIUM (49-66cm), LARGE (53-72cm). Standard profile colours: white and aluminum anodized.
- Especially suitable for light sheer fabrics.
- Comfortable removal of fabrics for cleaning thanks to easy click-in hangers and Velcro tape.
- Ceiling or wall fix with easy click-in brackets.
- Symmetrical and asymmetrical stacking possible.




2640

Profile and Bending Information


Main profile

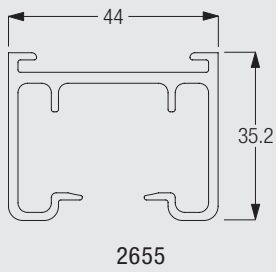


Recess profile



Recess profile for suspended ceiling application



How to measure & Stack size calculation

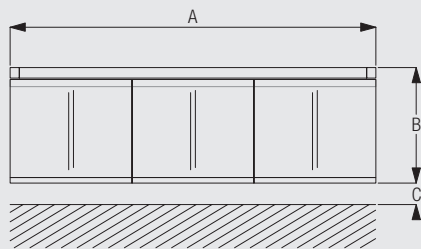


A: System width
 B: System height
 C: Distance between panel and floor 20 mm



2640

Stack size calculation

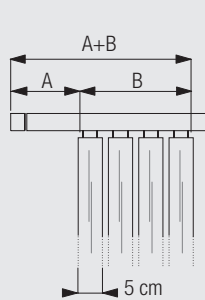

Total Stack Size (A+B)

Panel Width in cm	Number of Panels							
	1	2	3	4	5	6	7	8
40 - 43	19	24	29	34	39	44	49	54
44 - 46	20	25	30	35	40	45	50	55
47 - 50	21	26	31	36	41	46	51	56
51 - 55	22	27	32	37	42	47	52	57
56 - 58	23	28	33	38	43	48	53	58
59 - 63	24	29	34	39	44	49	54	59
64 - 66	25	30	35	40	45	50	55	60
67 - 71	26	31	36	41	46	51	56	61
71 - 72	27	32	37	42	47	52	57	62

A: Stack Gap
 B: Stack Width
 A+B: Total Stack Size

System and Panel Dimensions



5 m




3 m




max. 8 panels

Fixing points

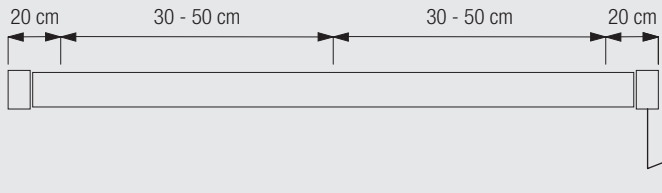


Fitting Options

Ceiling fitting with clamp 3033

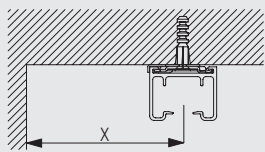


Paneel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25





The minimum distance from the wall (X) depends on the fabric type and manufacture, and on present obstacles.

Wall fitting with wall bracket 2645 and clamp 3033

2640




Paneel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25





The minimum distance from the wall (X) depends on the panel width (see table above). The wall bracket 2645 can be cut to measure up to a total length of maximum 30 cm.

Recess fitting with recess profile 2932

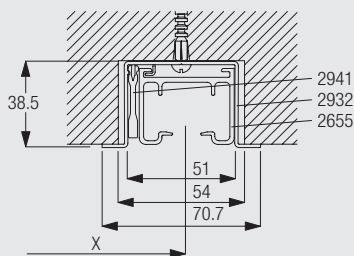


Paneel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
66-72	25






The minimum distance from the wall (X) depends on the panel width (see table above).

Recess fitting in suspended ceiling with recess profile 2948



Panel (cm)	X (cm)
40-45	18
46-50	19
51-55	21
56-60	22
61-65	23
65-72	25



The minimum distance from the wall (X) depends on the panel width (see table above).



2640

www.silentgliss.at
www.silentgliss-russia.com
www.silentgliss-cee.com

Silent Gliss GesmbH
Gewerbestraße 6
A - 6710 Nenzing
Tel. + 43 (0) 5525 64 111
Fax. + 43 (0) 5525 63 170

Silent Gliss GesmbH
Jochen-Rindt-Straße 1
A - 1230 Wien
Tel. + 43 (0) 1 615 02 72
Fax. + 43 (0) 1 615 02 72-88

Silent Gliss GesmbH
Vertriebsbüro / Showroom
Stubenring 6
A – 1010 Wien
Tel. +43 (0) 1 513 16 77
Fax. +43 (0) 1 513 16 77-88