


Roman Blind Systems





Roman Blind System

Silent Gliss® 2090

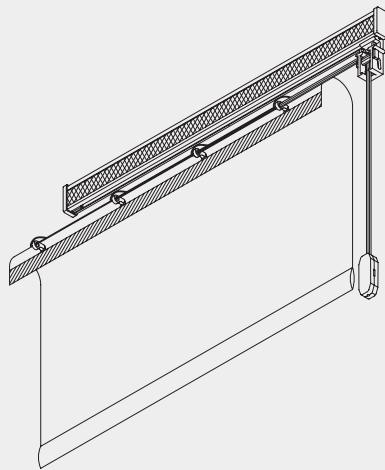


Product Information

- Cord operated Roman blind system for residential applications.
- Suitable for very light weight blinds.
- Fabric can easily be removed from headrail for washing/maintenance.
- Designed for excellent fitting on window frames.
- Maximum dimensions are 100 cm for the width and 200 cm for the height.
- The weight of the blind including the bottom weight bar should never exceed 0.7 kg.
- The roman blind system 2090 is available in single components, as kit or fully confectioned including curtain.
- The top stack of the fabric takes up about 15-20% of the blind drop (depending on fabric make-up).
- Beside fixation on window frame, this system can also be easily fitted on ceilings or walls.
- Large and attractive fabric offer.



2090

Profile and Bending Information

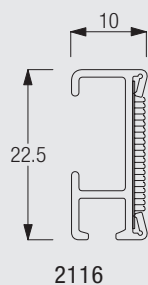

Only for straight systems.

System Dimensions



1 m





2 m



0,7 kg (inkl.
Beschwerungsprofil)

The system dimensions depend on the total fabric weight including the bottom weight bar.


Fitting on window frame

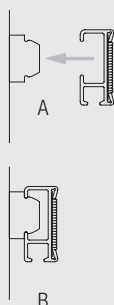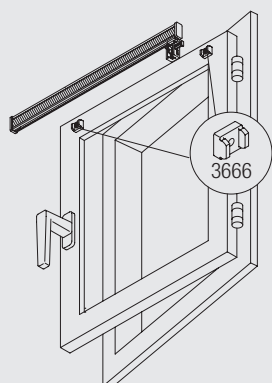


Fitting with clip bracket 3666 directly to the window frame,

Fitting and Sewing Information

Bracket Positioning

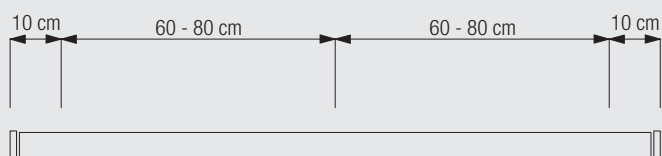


Insertion of cords in cord lock 3185

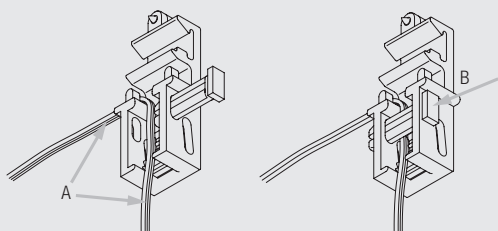


- A: Insert cords
- B: Secure cords with click-in pin

Fixing of cords

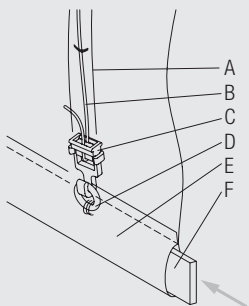

- A: 3074 Loop tape
- C: 3055 Hook
- D: 2093 Ring
- E: Hollow hem
- F: 2016 Bottom weight bar

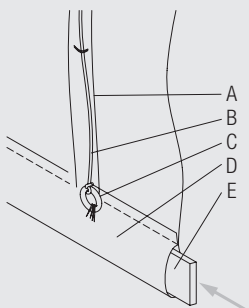



- A: 3074 Loop tape
- B: 3637 Cord
- C: 2093 Ring
- D: Hollow hem
- E: 2016 Bottom weight bar




2090

Fitting Options



Wall fitting with clip bracket 3666



Wall fitting with brackets 3655 and 3660



	X (mm)
3655	53
3660	65



Standard Accessories

2016	Weight bar		2093	Ring	
2131	Endcover		2215	Eyelet	
2216	Cord		2539	Tape	
2826	Bead chain connector		3055	Hook	
3074	Loop tape (delivery only with fabric)		3185	Cord lock	
3666	Bracket				



2090



2090

www.silentgliss.at
www.silentgliss-russia.com
www.silentgliss-cee.com

Silent Gliss GesmbH
Gewerbestraße 6
A - 6710 Nenzing

Tel. + 43 (0) 5525 64 111
Fax. + 43 (0) 5525 63 170

Silent Gliss GesmbH
Jochen-Rindt-Straße 1
A - 1230 Wien

Tel. + 43 (0) 1 615 02 72
Fax. + 43 (0) 1 615 02 72-88

Silent Gliss GesmbH
Vertriebsbüro / Showroom
Stubenring 6
A – 1010 Wien

Tel. +43 (0) 1 513 16 77
Fax. +43 (0) 1 513 16 77-88